



SPDT Electromechanical Relay Latching Switch, Unterminated DC to 40 GHz, up to 10W, 24V, Positive Common, 2.92mm Female Type

Electromechanical Relay Switches Technical Data Sheet

SWSDT-MK40G24V-L3S4-01

Features

- Single Pole Double Throw (SPDT) Electromechanical Relay Switch
- DC to 40 GHz Frequency Range
- Latching Actuator
- Positive Common Control
- With Indicator
- 2M Lifecycle Rating
- Insertion Loss 0.8 dB max
- VSWR as low as 1.8:1 max
- +24Volt DC Bias
- Solder Pin for DC Command Control
- -25°C to +65°C Operating Temperature
- Up to 10 Watt Average Power Handling
- 50 Ohm Design
- Isolation >55 dB typ
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- Wireless Communications
- Enterprise
- IoT

Description

The SWSDT-MK40G24V-L3S4-01 is a Single Pole Double Throw (SPDT) electromechanical relay switch that operates across a wide frequency range of DC to 40 GHz and can handle up to 10 W of average power in a break before make condition. The design is rated for 1 million lifecycles and features a Latching Actuator where the selected position remains active with constant voltage, all positions are open when voltage is removed. Impressive typical performance includes 0.8 dB insertion loss and isolation greater than 55 dB. This switch requires +24Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports 2.92mm Type female connectors and Solder Pin for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications

Switch Type SPDT
Actuator Type Latching

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
Operating Voltage	22	24	26	Volts
Actuating Set Current @ 24 Volts		107		mA
VSWR			1.80:1	
Insertion Loss			0.8	dB
Isolation	55			dB
Input Power (CW)			10	Watts
Switching Time			10	ms



SPDT Electromechanical Relay Latching Switch, Unterminated DC to 40 GHz, up to 10W, 24V, Positive Common, 2.92mm Female Type

Electromechanical Relay Switches Technical Data Sheet

SWSDT-MK40G24V-L3S4-01

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 12.4	12.4 to 18	18 to 26.5	26.5 to 40		GHz
VSWR, Max	1.25:1	1.30:1	1.60:1	1.80:1		
Insertion Loss, Max	0.40	0.50	0.65	0.80		dB
Isolation, Min	75	65	60	55		dB
Input Power, Max (CW)	55	45	24	10		Watts

Electrical Specification Notes:
Average Power and Actuating Current values at 25°C.

Mechanical Specifications

Size

Length	1.50 in [38.1 mm]
Width/Diameter	1.56 in [39.8 mm]
Height	0.51 in [13 mm]
Weight	0.099 lbs [45g]
Package Type	Connectorized
Operating Life	1,000,000 Cycles

Connectors

RF Connector Type	2.92mm Female
RF Connector Specification	MIL C 39012
Control Connector	Solder Pin

Mechanical Specification Notes:
D-Sub 15: [250°C max/30sec.](#)

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +85 deg C

Construction	Splashproof
Shock	MIL-STD-202, Method 213B, Cond.C
Vibration	MIL-STD-202, Method 204D, Cond.D

Environmental Specification Notes:
Environmental specifications are guaranteed but not tested.

Compliance Certifications

RoHS Compliant
REACH Compliant




SPDT Electromechanical Relay Latching Switch, Unterminated DC to 40 GHz, up to 10W, 24V, Positive Common, 2.92mm Female Type

Electromechanical Relay Switches Technical Data Sheet


SWSDT-MK40G24V-L3S4-01

Typical Performance data


V.S.W.R(Typical)

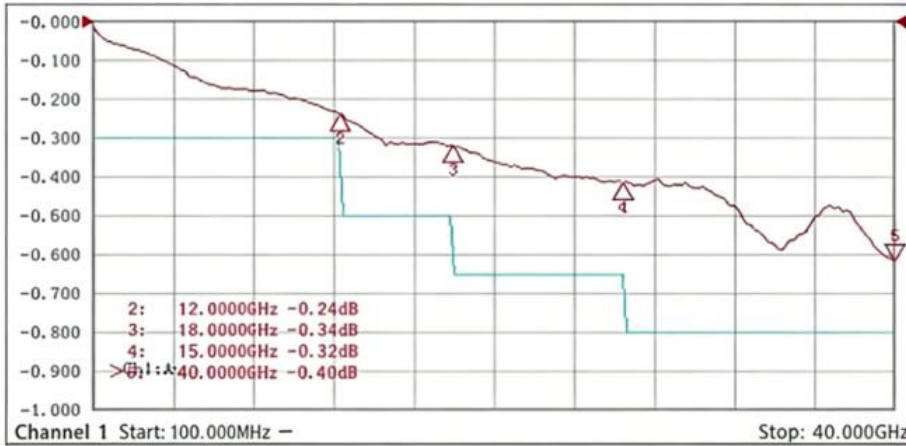

Insertion Loss(Typical)

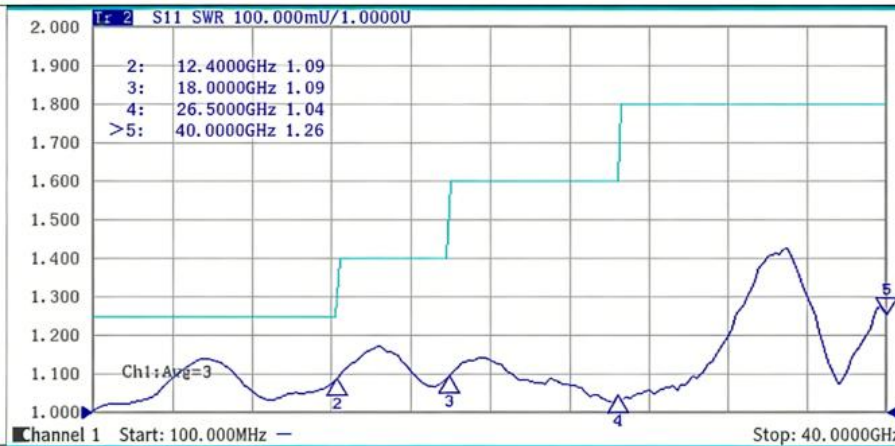


Isolation(Typical)

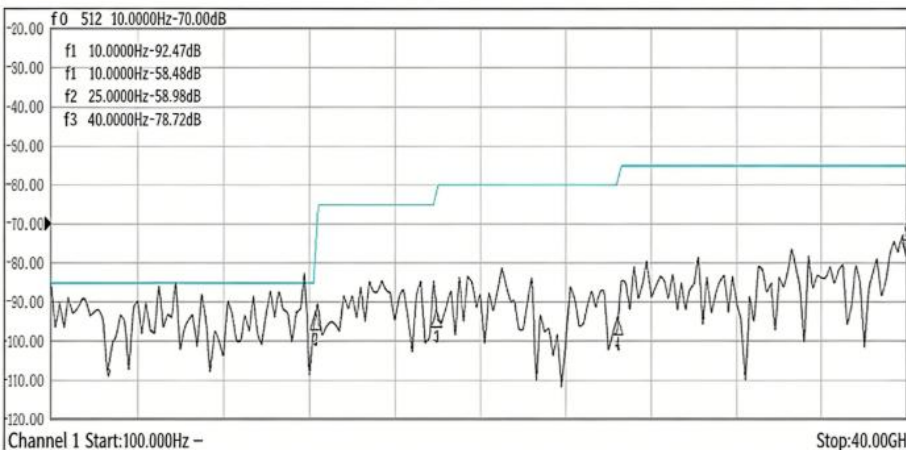




SPDT Electromechanical Relay Latching Switch, Unterminated DC to 40 GHz, up to 10W, 24V, Positive Common, 2.92mm Female Type

CAD Drawing

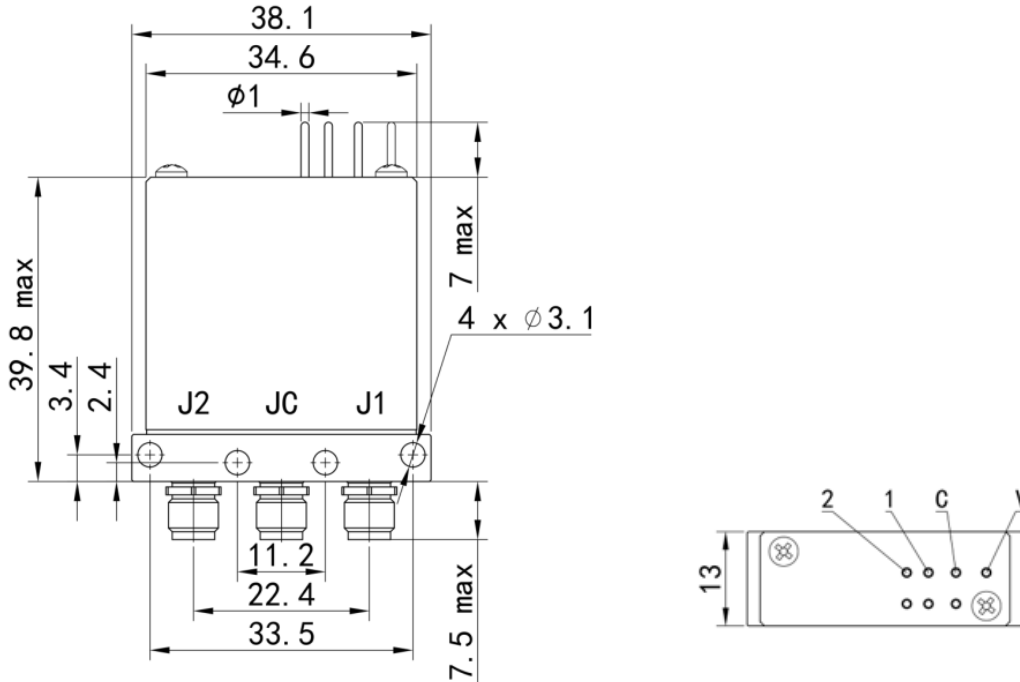

Schematic & Truth Table/ PIN Assignment:

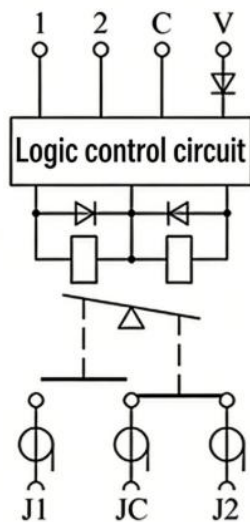

PIN ASSIGNMENT	RF PATH
"1" ↔ GND	J1 ↔ JC
"2" ↔ GND	J2 ↔ JC
V = +VDC	
C = GND	

LOGIC LOW (OFF)= 0-0.8 Vdc
LOGIC HIGH (ON)= 2.5-5.5 Vdc