



SP6T Electromechanical Relay Latching Switch, Unterminated DC to 12.4 GHz, up to 170W, 12V, TTL(H), N Female Type

Electromechanical Relay Switches Technical Data Sheet

SWS6T-NC12G12V-L3D5-01

Features

- Single Pole Six Throw (SP6T) Electromechanical Relay Switch
- DC to 12.4 GHz Frequency Range
- Latching Actuator
- TTL Logic Control
- 2M Lifecycle Rating
- Insertion Loss 0.5 dB typ
- VSWR as low as 1.5:1 max
- +12Volt DC Bias
- D-Sub 15 for DC Command Control
- -25°C to +65°C Operating Temperature
- Up to 170 Watt Average Power Handling
- 50 Ohm Design
- Isolation >60 dB typ
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- Wireless Communications
- Enterprise
- IoT

Description

The SWS6T-NC12G12V-L3D5-01 is a Single Pole Six Throw (SP6T) electromechanical relay switch that operates across a wide frequency range of DC to 12.4 GHz and can handle up to 170W of average power in a break before make condition. The design is rated for 2 million lifecycles and features a Latching Actuator where the selected position remains active with constant voltage, all positions are open when voltage is removed. Impressive typical performance includes 0.5 dB insertion loss and isolation greater than 80 dB. This switch requires +12Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports N Type female connectors and D-sub 15pin for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications

Switch Type	SP6T
Actuator Type	Latching
Self Cut-Off Time	40ms< CT< 120ms

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
Impedance		50		Ohms
Operating Voltage	10.2	12	13	Volts
Actuating Set Current @ 28 Volts		320		mA
VSWR			1.50:1	
Insertion Loss			0.5	dB
Isolation	80			dB
Input Power (CW)			170	Watts
Switching Time			15	ms



SP6T Electromechanical Relay Latching Switch, Unterminated DC to 12.4 GHz, up to 170W, 12V, TTL(H), N Female Type

Electromechanical Relay Switches Technical Data Sheet

SWS6T-NC12G12V-L3D5-01

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 8	8 to 12.4			GHz
VSWR, Max	1.20:1	1.35:1	1.50:1			
Insertion Loss, Max	0.25	0.35	0.5			dB
Isolation, Min	80	70	60			dB
Input Power, Max (CW)	350	210	170			Watts

Electrical Specification Notes:

Average Power and Actuating Current values at 25°C.

Mechanical Specifications

Size

Length	3.72 in [94.5 mm]
Width/Diameter	2.5 in [63.5mm]
Height	2.5 in [63.5mm]
Weight	1.014 lbs [460g]
Package Type	Connectorized
Operating Life	1,000,000 Cycles

Connectors

RF Connector Type	N Female
RF Connector Specification	MIL C 39012
Control Connector	D-Sub 15

Mechanical Specification Notes:

D-Sub 15: 250°C max/30sec.

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +85 deg C

Construction	Splashproof
Shock	MIL-STD-202, Method 213B, Cond.C
Vibration	MIL-STD-202, Method 204D, Cond.D

Environmental Specification Notes:

Environmental specifications are guaranteed but not tested.

Compliance Certifications

RoHS Compliant
REACH Compliant

SP6T Electromechanical Relay Latching Switch, Unterminated DC to 12.4 GHz, up to 170W, 12V, TTL(H), N Female Type




Electromechanical Relay Switches Technical Data Sheet


SWS6T-NC12G12V-L3D5-01

Typical Performance data


Insertion Loss(Typical)

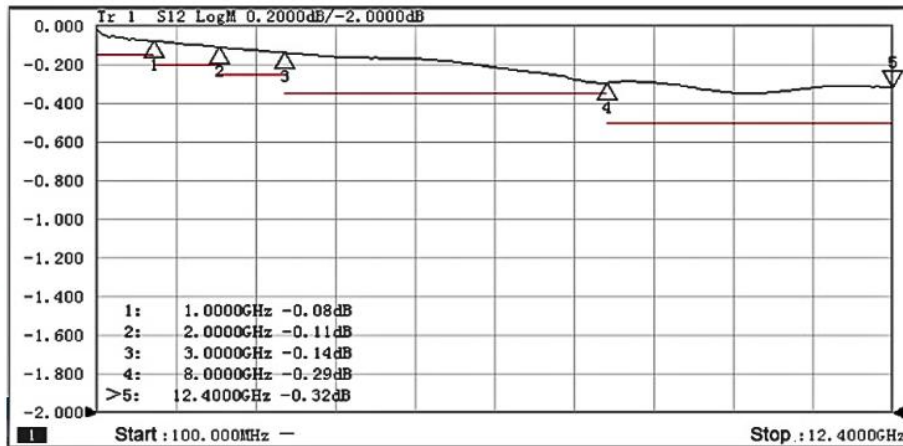

V.S.W.R(Typical)

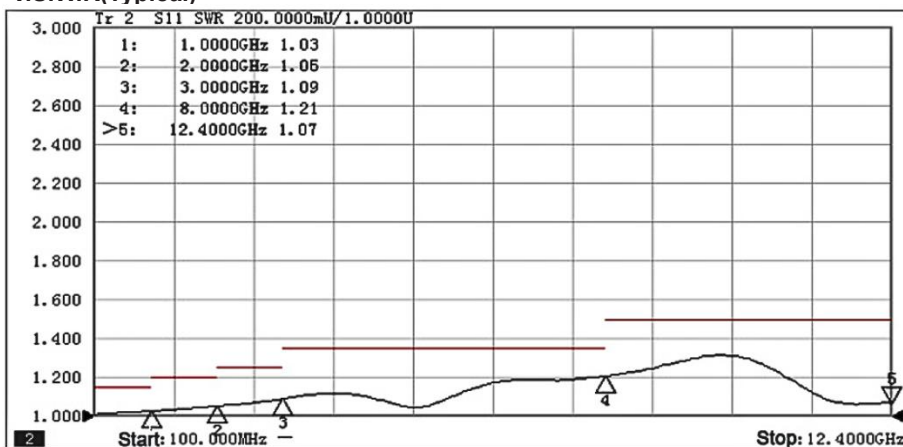

Isolation(Typical)

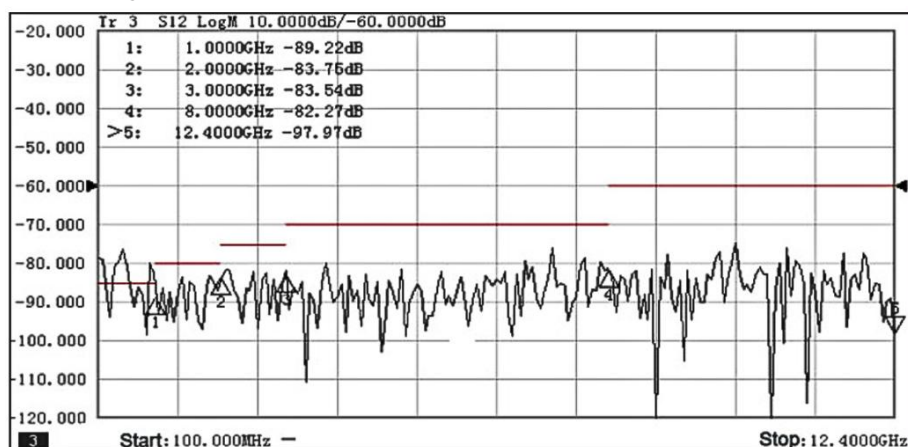


SP6T Electromechanical Relay Latching Switch, Unterminated DC to 12.4 GHz, up to 170W, 12V, TTL(H), N Female Type




Electromechanical Relay Switches Technical Data Sheet

SWS6T-NC12G12V-L3D5-01

CAD Drawing

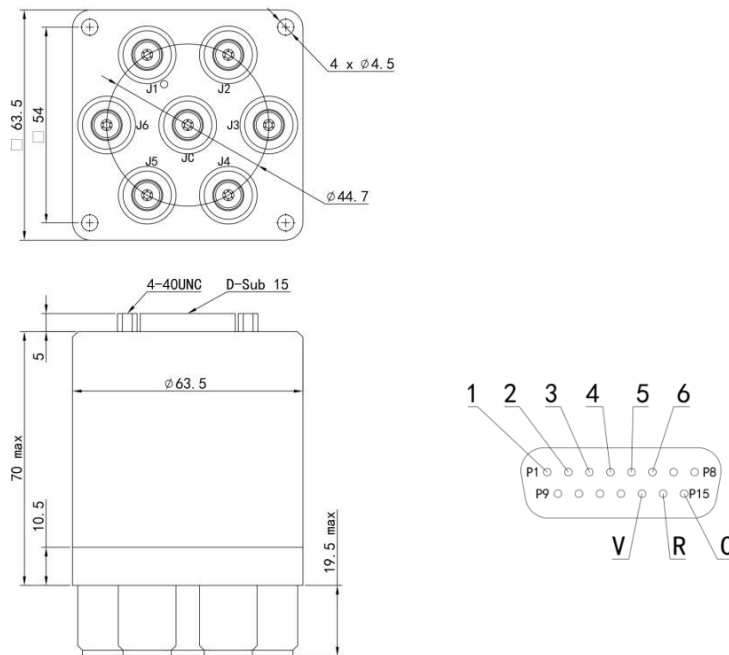

Schematic & Truth Table/ PIN Assignment:

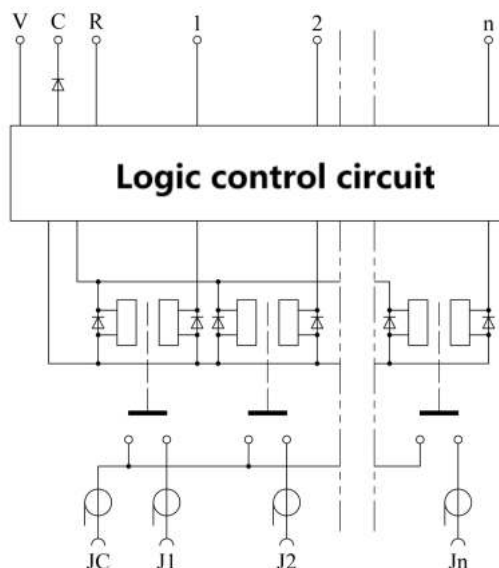

PIN ASSIGNMENT	RF PATH
"1"=1	J1 ↔ JC
"2"=1	J2 ↔ JC
"3"=1	J3 ↔ JC
"4"=1	J4 ↔ JC
"5"=1	J5 ↔ JC
"6"=1	J6 ↔ JC
V (Voltage)	
"R"=1	Reset: All Ports Open
C (GND)	

LOGIC LOW (OFF)= 0-0.8 Vdc

LOGIC HIGH (ON)= 2.5-5.5 Vdc