

SP8T Electromechanical Relay Latching Switch, Terminated DC to 40 GHz, up to 5W, 12V, TTL, 2.92mm Female Type

Electromechanical Relay Switches Technical Data Sheet

SWL8T-MK40G12V-L3D5-01

Features

- Single Pole Eight Throw (SP8T) with Terminated Electromechanical Relay Switch
- DC to 40 GHz Frequency Range
- Latching Actuator
- TTL Logic Control
- 2M Lifecycle Rating
- Insertion Loss 1.1 dB typ
- VSWR as low as 1.9:1 max
- +12Volt DC Bias
- D-Sub 15 for DC Command Control
- -25°C to +65°C Operating Temperature
- Up to 5 Watt Average Power Handling
- 50 Ohm Design
- Isolation >50 dB typ
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- Wireless Communications
- Enterprise
- IoT

Description

The SWL8T-MK40G12V-L3D5-01 is a Single Pole Eight Throw (SP8T) with terminated electromechanical relay switch that operates across a wide frequency range of DC to 40GHz and can handle up to 5W of average power in a break before make condition. The design is rated for 2 million lifecycles and features a Latching Actuator where the selected position remains active with constant voltage, all positions are open when voltage is removed. Impressive typical performance includes 1.1 dB insertion loss and isolation greater than 50 dB. This switch requires +12Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports 2.92mmType female connectors and D-sub 15pin for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications

Switch Type
Actuator Type

SP8T,Terminated
Latching

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
Impedance		50		Ohms
Operating Voltage	10.2	12	13	Volts
Actuating Set Current @ 28 Volts		320		mA
VSWR			1.90:1	
Insertion Loss			1.10	dB
Isolation	50			dB
Input Power (CW)			120	Watts
Switching Time			15	ms

SP8T Electromechanical Relay Latching Switch, Terminated DC to 40 GHz, up to 5W, 12V, TTL, 2.92mm Female Type



Electromechanical Relay Switches Technical Data Sheet

SWL8T-MK40G12V-L3D5-01

Performance by Frequency

Description	F1	F2	F3	F4	F5	F6	Units
Frequency Range	DC to 3	3 to 8	8 to 12.4	12.4 to 18	18 to 26.5	26.5 to 40	GHz
VSWR, Max	1.20:1	1.30:1	1.40:1	1.50:1	1.80:1	1.90:1	
Insertion Loss, Max	0.20	0.30	0.40	0.50	1.00	1.10	dB
Isolation, Min	80	70	65	60	55	50	dB
Input Power, Max (CW)	55	32	27	22	14	5	Watts

Electrical Specification Notes:

Average Power and Actuating Current values at 25°C.

Mechanical Specifications

Size

Length	2.42 in [61.5 mm]
Width/Diameter	2.75 in [70mm]
Height	2.75 in [70mm]
Weight	0.705 lbs [320g]
Package Type	Connectorized
Operating Life	2,000,000 Cycles

Connectors

RF Connector Type	SMA Female
RF Connector Specification	MIL C 39012
Control Connector	D-Sub 15

Mechanical Specification Notes:

D-Sub 15: 250°C max/30sec.

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +85 deg C

Construction	Splashproof
Shock	MIL-STD-202, Method 213B, Cond.C
Vibration	MIL-STD-202, Method 204D, Cond.D


Environmental Specification Notes:

Environmental specifications are guaranteed but not tested.

Compliance Certifications

RoHS Compliant
REACH Compliant

SP8T Electromechanical Relay Latching Switch, Terminated DC to 40 GHz, up to 5W, 12V, TTL, 2.92mm Female Type




Electromechanical Relay Switches Technical Data Sheet


SWL8T-MK40G12V-L3D5-01

Typical Performance data


Insertion Loss(Typical)

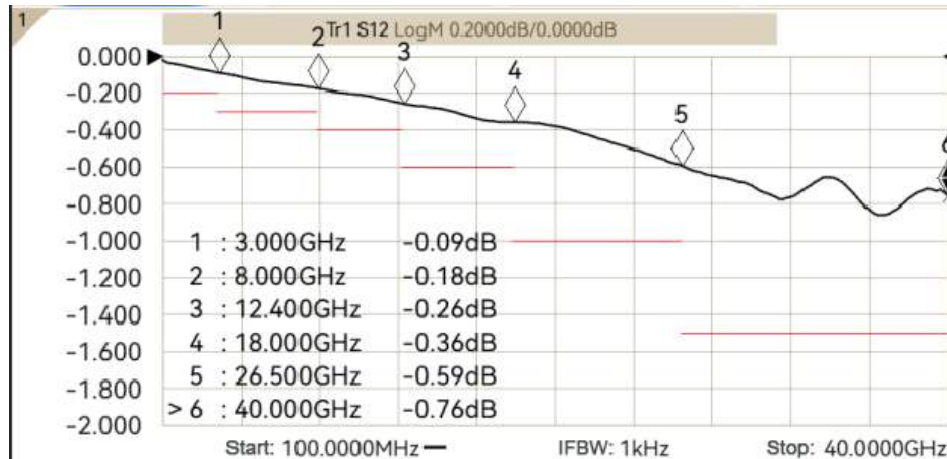


V.S.W.R(Typical)

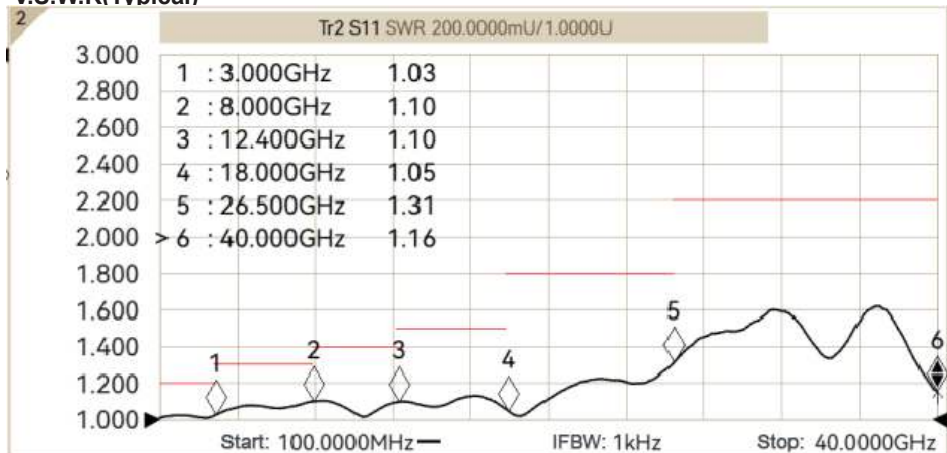

Isolation(Typical)

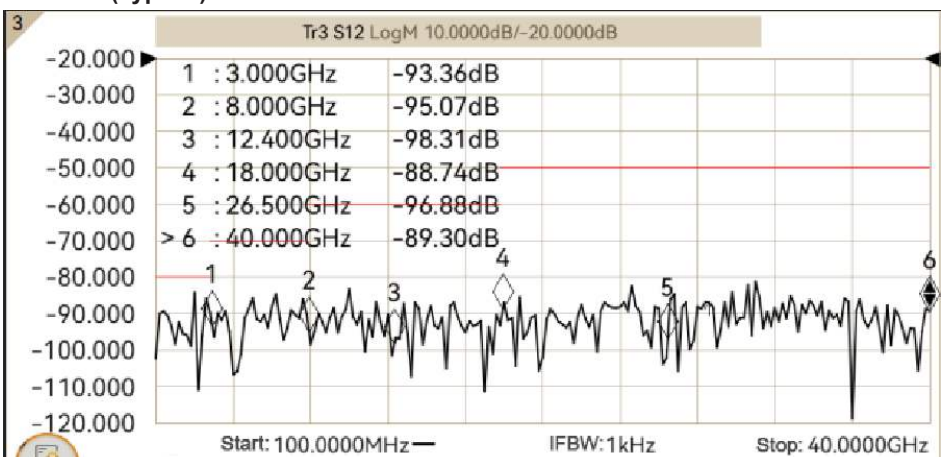



SP8T Electromechanical Relay Latching Switch, Terminated DC to 40 GHz, up to 5W, 12V, TTL, 2.92mm Female Type




Electromechanical Relay Switches Technical Data Sheet

SWL8T-MK40G12V-L3D5-01

CAD Drawing

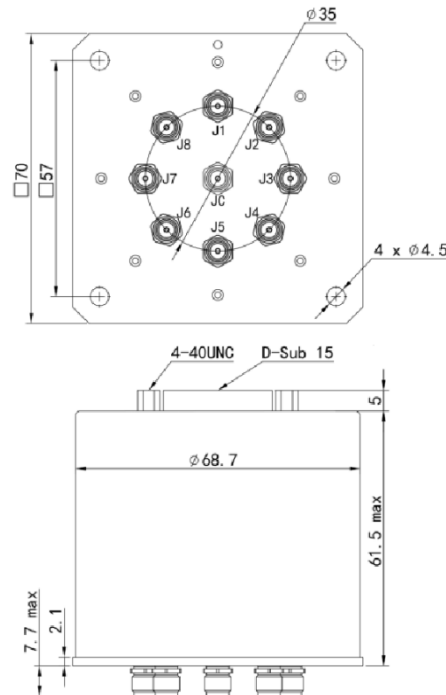

Schematic & Truth Table/ PIN Assignment:

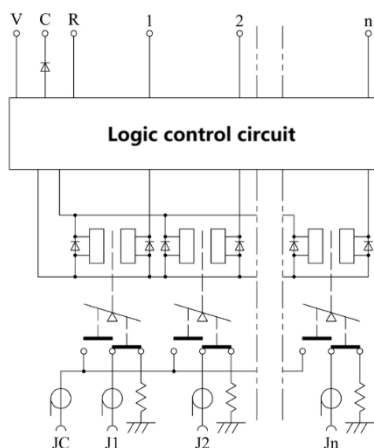

PIN ASSIGNMENT	RF PATH
"1"=1	J1 ↔ JC
"2"=1	J2 ↔ JC
"3"=1	J3 ↔ JC
"4"=1	J4 ↔ JC
"5"=1	J5 ↔ JC
"6"=1	J6 ↔ JC
"7"=1	J7 ↔ JC
"8"=1	J8 ↔ JC
V (Voltage)	
"R"=1	Reset: All Ports Open
C (GND)	

LOGIC LOW (OFF)= 0-0.8 Vdc

LOGIC HIGH (ON)= 2.5-5.5 Vdc