



SP4T Electromechanical Relay Latching Switch, Unterminated DC to 18 GHz, up to 80W, 12V, TTL(H) , SMA Female Type

Electromechanical Relay Switches Technical Data Sheet PN: SWS4T-MA18G12V-L3D9-01 REV-A0

Features

- Single Pole Four Throw (SP4T) Electromechanical Relay Switch
- DC to 18 GHz Frequency Range
- Latching Actuator
- TTL Logic Control
- 2.5M Lifecycle Rating
- Insertion Loss 0.6 dB Max
- VSWR as low as 1.45:1 Max
- +12Volt DC Bias
- D-Sub 9 for DC Command Control
- -25°C to +65°C Operating Temperature
- Up to 80Watt Average Power Handling
- 50 Ohm Design
- Isolation >65 dB typ
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- Wireless Communications
- Enterprise
- IoT

Description

The SWS4T-MA18G12V-L3D9-01 is a Single Pole Four Throw (SP4T) electromechanical relay switch that operates across a wide frequency range of DC to 18 GHz and can handle up to 80W of average power in a break before make condition. The design is rated as 2.5 million lifecycles and features a Latching Actuator where the selected position remains active with constant voltage, all positions are open when voltage is removed. Impressive max performance includes 0.6 dB insertion loss and isolation greater than 65 dB. This switch requires +12Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports SMA Type female connectors and D-sub 9pin for DC control. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications

Switch Type
Actuator Type

SP4T
Latching

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Operating Voltage	10.2	12	13	Volts
Actuating Set Current @ 12 Volts		320		mA
VSWR			1.45:1	
Insertion Loss			0.6	dB
Isolation	65			dB
Input Power (CW)			80	Watts
Switching Time			15	ms



SP4T Electromechanical Relay Latching Switch, Unterminated DC to 18 GHz, up to 80W, 12V, TTL(H) , SMA Female Type

Electromechanical Relay Switches Technical Data Sheet PN: SWS4T-MA18G12V-L3D9-01 REV-A0

Performance by Frequency

Description	F1	F2	F3	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18	GHz
VSWR, Max	1.25:1	1.35:1	1.45:1	
Insertion Loss, Max	0.40	0.50	0.60	dB
Isolation, Min	80	70	65	dB
Input Power, Max (CW)	120	90	80	Watts

Electrical Specification Notes:

Average Power and Actuating Current values at 25°C.

Mechanical Specifications

Size

Length	2.42 in [61.5 mm]
Width/Diameter	1.75 in [44.5mm]
Height	1.75 in [44.5mm]
Weight	0.396 lbs [180g]
Package Type	Connectorized
Operating Life	2,500,000 Cycles

Connectors

RF Connector Type	SMA Female
RF Connector Lifecycle	≥500 cycles
RF Connector Specification	MIL C 39012
Control Connector	D-Sub 9

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +85 deg C

Construction	Splashproof
Shock	MIL-STD-202, Method 213B, Cond.C
Vibration	MIL-STD-202, Method 204D, Cond.D

Environmental Specification Notes:

Environmental specifications are guaranteed but not tested.

Compliance Certifications

RoHS Compliant
REACH Compliant



SP4T Electromechanical Relay Latching Switch, Unterminated
DC to 18 GHz, up to 80W, 12V, TTL(H) , SMA Female Type


Electromechanical Relay Switches Technical Data Sheet **PN: SWS4T-MA18G12V-L3D9-01** **REV-A0**

Typical Performance data


Insertion Loss(Typical)



V.S.W.R(Typical)

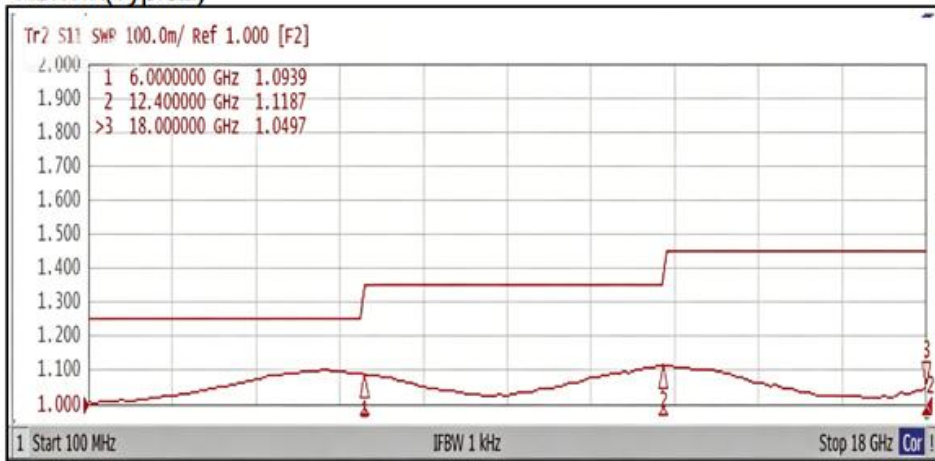

Isolation(Typical)

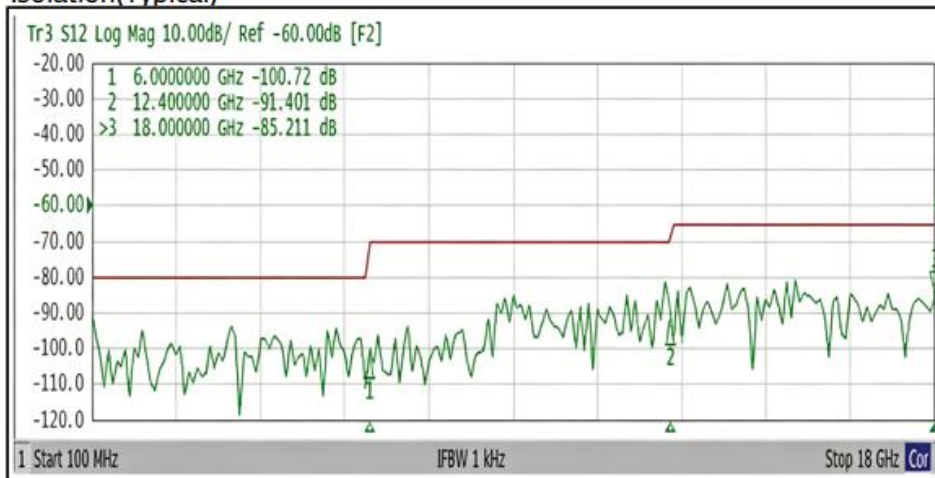




SP4T Electromechanical Relay Latching Switch, Unterminated DC to 18 GHz, up to 80W, 12V, TTL(H) , SMA Female Type


Electromechanical Relay Switches Technical Data Sheet PN: SWS4T-MA18G12V-L3D9-01 REV-A0

CAD Drawing

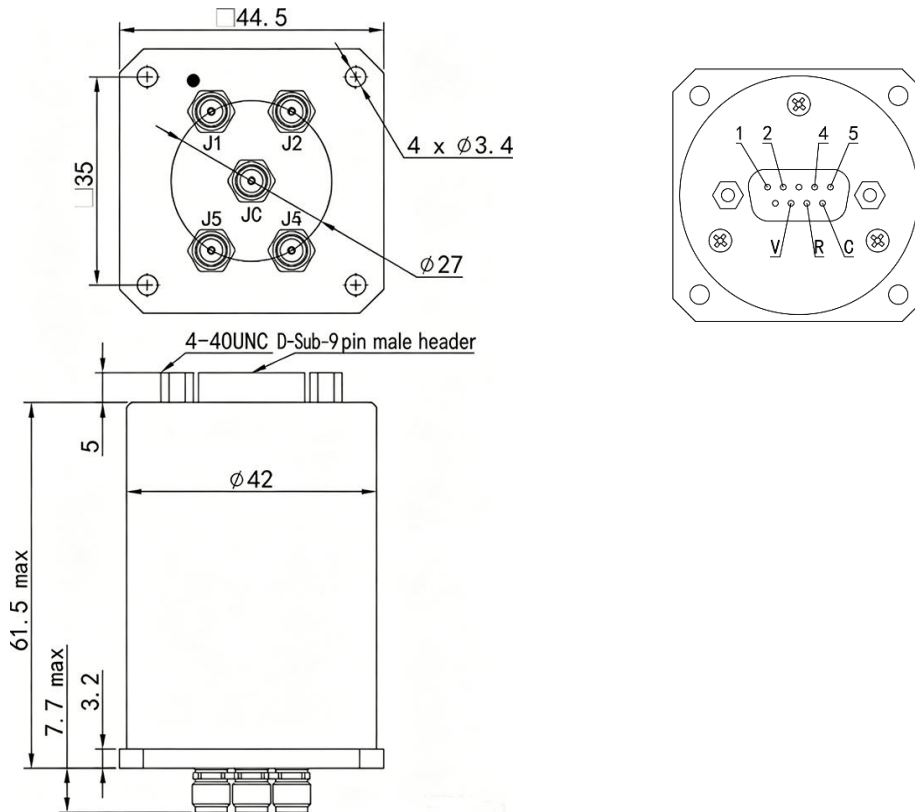

All dimensions are in mm, with a tolerance of ± 0.5

Schematic & Truth Table/ PIN Assignment:

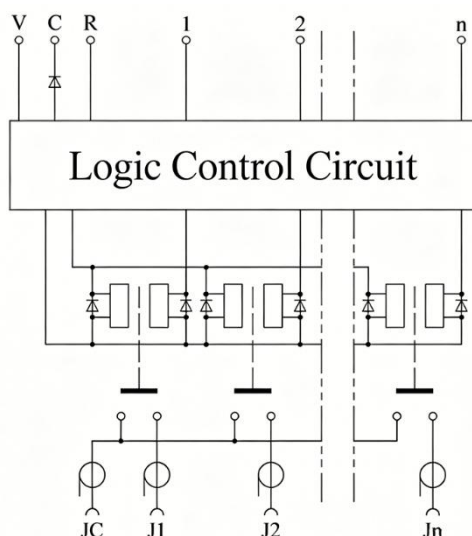

PIN ASSIGNMENT	RF PATH
"1"=1	J1 $\leftrightarrow$ JC
"2"=1	J2 $\leftrightarrow$ JC
"3"=1	J4 $\leftrightarrow$ JC
"4"=1	J5 $\leftrightarrow$ JC
V (Voltage)	
"R"=1	Reset: All Ports Open
C (GND)	

LOGIC LOW (OFF)= 0-0.8 Vdc

LOGIC HIGH (ON)= 2.5-5.5 Vd